


Style RC4

Aluminum Housing surface mount RTD

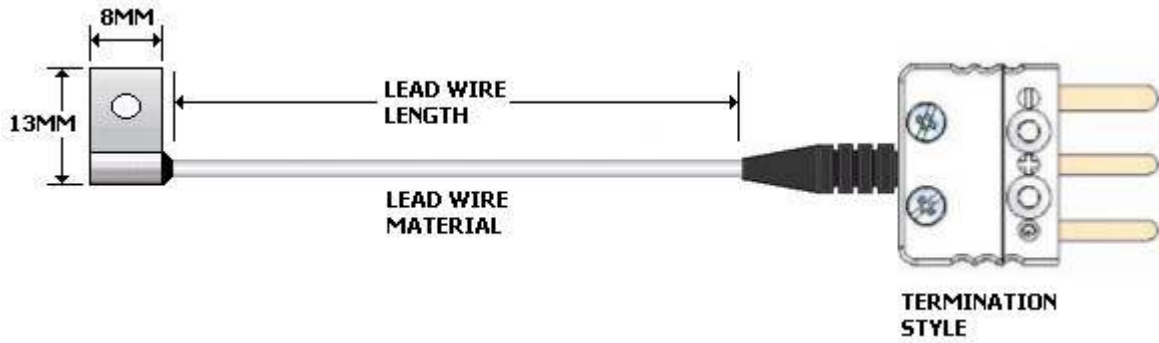

Ordering Information

① RC4	② Element type	③ Element Accuracy (0 °C)	④ Wire Configuration	⑤ Bracket Type	⑥ Lead wire material	⑦ Lead wire Length (In.)	⑧ Termination Style	⑨ Special Features
RC4	T		3	Y	B			

Optional

②	Element type
T	100 Ω DIN 00385 (thin film)

③	Element Accuracy (0 °C)
A	Class A (0.06%)
B	Class B (0.12%)

④	Wire Configuration
3	3-wire

⑤	Bracket type
Y	8MM X 13MM Aluminum housing with #4 hole

⑥	Lead wire material
B	Fluoropolymer (400°F)

⑦	Lead wire length
006-600"	Specify in Inches
	<i>Over 600" contact factory</i>

⑧	Termination style
A	2" stripped leads (bare ends) (standard)
D	Standard male 3 pin plug (400°F)
G	Standard 3 pin female jack (400°F)
P	Miniature male 3 pin plug (400°F)
K	Miniature female 3 pin jack (400°F)
W	2" stripped leads w/ pin terminals
Q	2" stripped leads w/ wire ferrules

Optional

⑨	Special features
Note	<i>Leave blank for no special features</i>
07	Cable clamp
09	Mating connector
42	Rubber strain relief for mini connector

SOUTHWEST HEATER AND CONTROLS

Main# 214-340-7500

Toll Free#: 800-687-2220

EMAIL: sales@swhc.com

WEB: www.swhc.com