
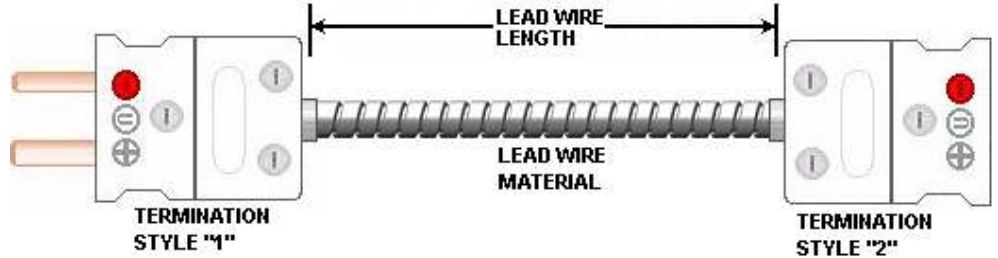


Series RH1 RTD Extension Cable

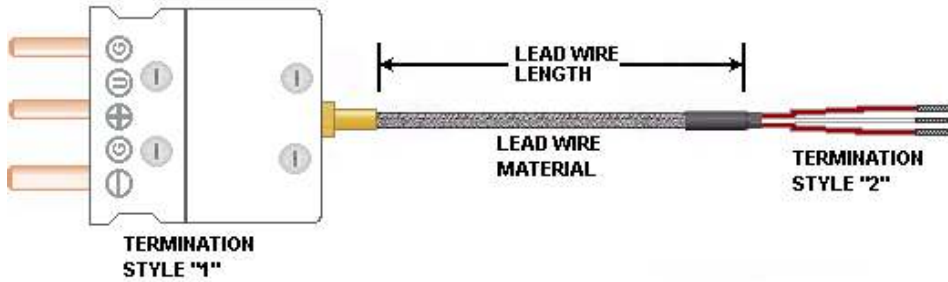

Ordering Information Part Number

①	②	③	④	⑤	⑥	⑦
RH1	Wire Configuration	Termination Style "1"	Lead wire material	Lead wire Length (In.)	Termination Style "2"	Special Features
RH1						

②	Wire Configuration
2	2-wire
3	3-wire
4	4-wire
5	2-wire (Dual)
6	3-wire (Dual)

③	Termination style "1"
A	2" stripped leads (bare ends) (standard)
B	2" stripped leads w/ #8 spade lugs
C	Standard male 2 pin plug (400°F)
D	Standard male 3 pin plug (400°F)
F	Standard 2 pin female jack (400°F)
G	Standard 3 pin female jack (400°F)
H	Miniature male 2 pin plug (400°F)
P	Miniature male 3 pin plug (400°F)
J	Miniature female 2 pin jack (400°F)
K	Miniature female 3 pin jack (400°F)
R	Dual molded male 4 pin plug (400°F)(for dual 2 wire)
T	Dual molded female 4 hole jack (400°F)(for dual 2 wire)
W	2" stripped leads w/ pin terminals
Q	2" stripped leads w/ wire ferrules
X	Extra long lead wire length (beyond 2" stripped leads) (specify extra long lead wire length below)
006"-240"	006"-240" Specify in Inches

④	Lead wire material
A	Fiberglass (800°F)
B	Fluoropolymer (400°F)
C	Fiberglass with stainless steel braid (800°F)
D	Fluoropolymer with stainless steel braid (400°F)
E	Fiberglass with armor cable (800°F)
F	Fluoropolymer with armor cable (400°F)
G	Fiberglass with stainless steel braid w/ armor cable (800°F)
H	Fluoropolymer with stainless steel braid w/ armor cable (400°F)

⑤	Lead wire length (whole in.)
006"-600"	Specify in Inches
Note	Over 600" contact factory

⑥	Termination style "2"
A	2" stripped leads (bare ends) (standard)
B	2" stripped leads w/ #8 spade lugs
C	Standard male 2 pin plug (400°F)
D	Standard male 3 pin plug (400°F)
F	Standard 2 pin female jack (400°F)
G	Standard 3 pin female jack (400°F)
H	Miniature male 2 pin plug (400°F)
P	Miniature male 3 pin plug (400°F)
J	Miniature female 2 pin jack (400°F)
K	Miniature female 3 pin jack (400°F)
R	Dual molded male 4 pin plug (400°F)(for dual 2 wire)
T	Dual molded female 4 hole jack (400°F)(for dual 2 wire)
W	2" stripped leads w/ pin terminals
Q	2" stripped leads w/ wire ferrules
X	Extra long lead wire length (beyond 2" stripped leads) (specify extra long lead wire length below)
006"-240"	006"-240" Specify in Inches

⑦	Special features (Optional) RTDS
Note	Leave blank for no special features
07	Cable clamp
08	BX Connector
09	Mating connector
18	Moisture protection boot on connector
21	Fluoropolymer coated armor cable
36	RTD color code White- White- Red (FEP Fluoropolymer)
37	RTD color code Black- White- Red (FEP Fluoropolymer)
38	RTD color code Blue- Orange- White (FEP Fluoropolymer)

Contact our sales department for other configurations

SOUTHWEST HEATER AND CONTROLS

Main# 214-340-7500

Toll Free#: 800-687-2220

EMAIL: sales@swhc.com

WEB: www.swhc.com