


# Style TD1

## Mounting bracket thermocouple w/4mm OD probe

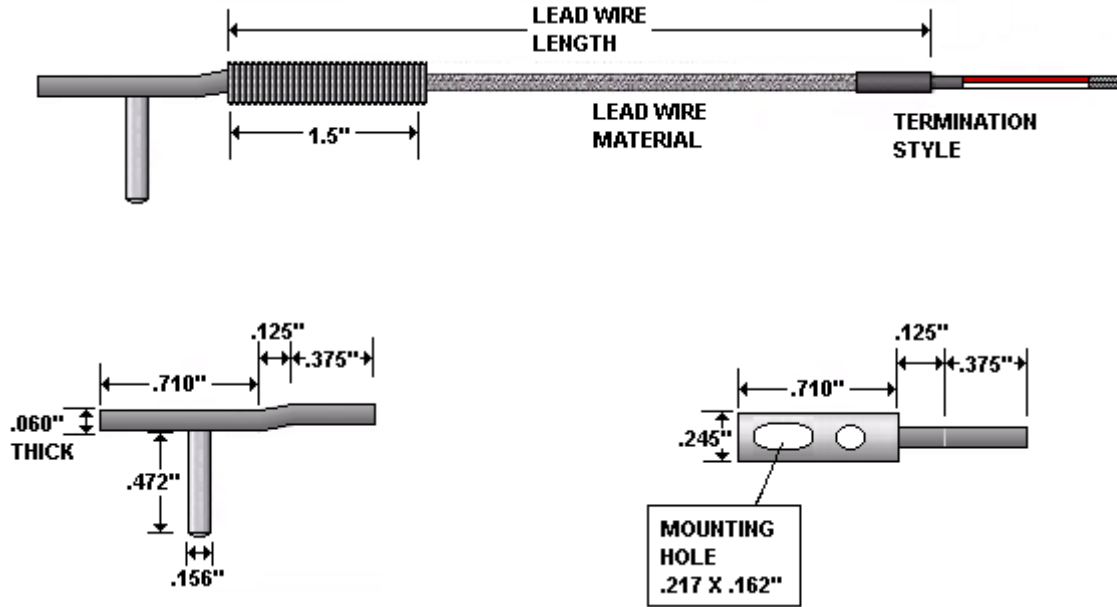

### Ordering Information

① TD1	② Calibration	③ Mounting bracket	④ Junction	⑤ Lead wire material	⑥ Lead wire Length (In.)	⑦ Termination Style
TD1		X				

### Optional

⑧ Special Features

② Calibration
J Type J
K Type K
T Type T
E Type E

③ Mounting bracket
X 4mm OD probe. 90 degree mounting bracket
<b>Note</b> For other sizes consult factory

④ Junction
G Grounded (standard)
U Ungrounded

⑤ Lead wire material
A Fiberglass (800°F)
B Fluoropolymer (400°F)
C Polyimide (500°F)
F Fiberglass with stainless steel braid (800°F)
G Fluoropolymer with stainless steel braid (400°F)
H Fiberglass with armor cable (800°F)
J Fluoropolymer with armor cable (400°F)
K Polyimide with armor cable (500°F)
M Fiberglass with stainless steel braid with armor cable (800°F)
<b>Note</b> Wire gauge based on sheath diameter

⑥ Lead wire length
006-600" Specify in Inches
Over 600" contact factory

⑦ Termination style
A 2" stripped leads (bare ends)
B 2" stripped leads w/ spade lugs
C Standard male plug (400°F)
D High temp male Plug (660°F)
E Max temp male Plug (800°F)
G Solid pin plug (400°F)
H Standard female jack (400°F)
J Miniature plug (400°F)
K Miniature jack (400°F)
L 2" stripped leads w/#6 Ring terminals
M 2 Standard male plugs (dual junctions) (400°F)
N Standard 3 pin plug w/ ground wire (400°F)
W 2" stripped leads w/ pin terminals
Q 2" stripped leads w/ wire ferrules
X Extra long lead wire length (beyond 2" stripped leads) <i>(specify extra long lead wire length below)</i>
X 006"-240" Specify in Inches

⑧ Special features (Optional)
<b>Note</b> Leave blank for no special features
01 Solid conductor (Lead wire)
07 Cable clamp
08 Bx Connector
09 Mating connector
11 International IEC 584-3 color coded leads
12 British color coded leads
13 German color coded leads
14 Japanese color coded leads
15 Reverse polarity color coded leads
16 French color coded leads
18 Moisture protection boot on connector

**SOUTHWEST HEATER AND CONTROLS**

Main# 214-340-7500

Toll Free#: 800-687-2220

EMAIL: sales@swhc.com

WEB: www.swhc.com