


Thermowell with Straight threaded bar stock Series 100

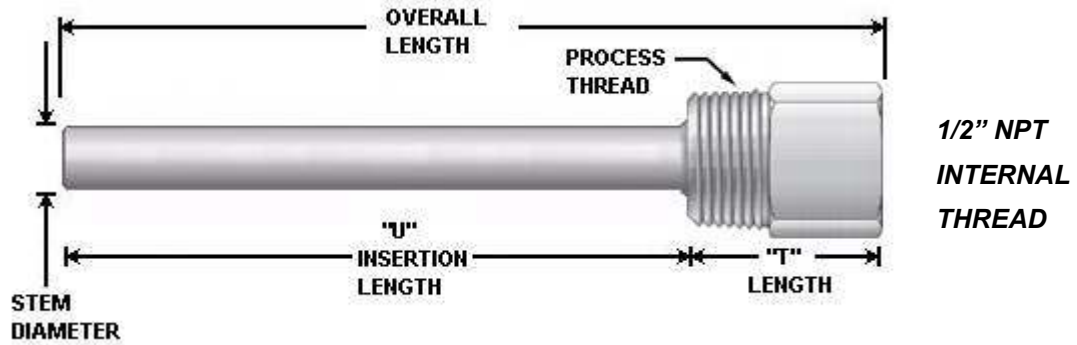

**! Ö eÖng In"oÖ# tionY
P' ÖY\$%# &eÖ**

①	②	③	④	⑤	⑥	⑦
KK	PÖrekky wÖÖ r Y	BoÖ'S-ÖeY	"U"Y InkeÖ.onW LengtÖY	"U"YInkeÖ.onW LengtÖY (FÖ r .In Y	"W"YLengtÖY	WellW M teÖ IY
100						Y

② Y	PÖrekky wÖÖ r Y	Stem Y : # eteÖ
) Y	1/2"NPT x .625" OD	
* Y	3/4"NPT x .75"OD	
+ Y	1"NPT x .875"OD	
W Y	3/4"NPT x .500"OD	
w Y	3/8"NPT X .500"OD	

③ Y	BoÖ'S-ÖeY
2 Y	.265"
3 Y	.390"

④	"U"YInkeÖ.onW LengtÖY(WÖleIn. Y
KK "/KÖ1"Y	Specify in Inches
Y	Over 048" contact factory

⑤	"U"YInkeÖ.onW LengtÖY(Ö r t-on IYn. Y
4 Y	0
B Y	1/8"
5 Y	1/4"
(Y	3/8"
6 Y	1/2"
F Y	5/8"
2 Y	3/4"
3 Y	7/8"

⑥	"W"YLengtÖY
F Y	- , - "Y

⑦	WellW M teÖ IY
M	304SS
P Y	316 SS
7 Y	310 SS
R	316 L SS
S	410 SS
T	446 SS
K	Inconel 600 (Alloy 600)
W	Hastelloy B
X	Hastelloy C
Y	Carbon Steel
Z	Alloy 800 (Incoloy)

- **Not all bore sizes available in all configurations**
- **Diameter is determined by process thread & or bore size**
- **Other well materials available**

SOUTHWEST HEATER AND CONTROLS